


9.00
8.50

812
110W

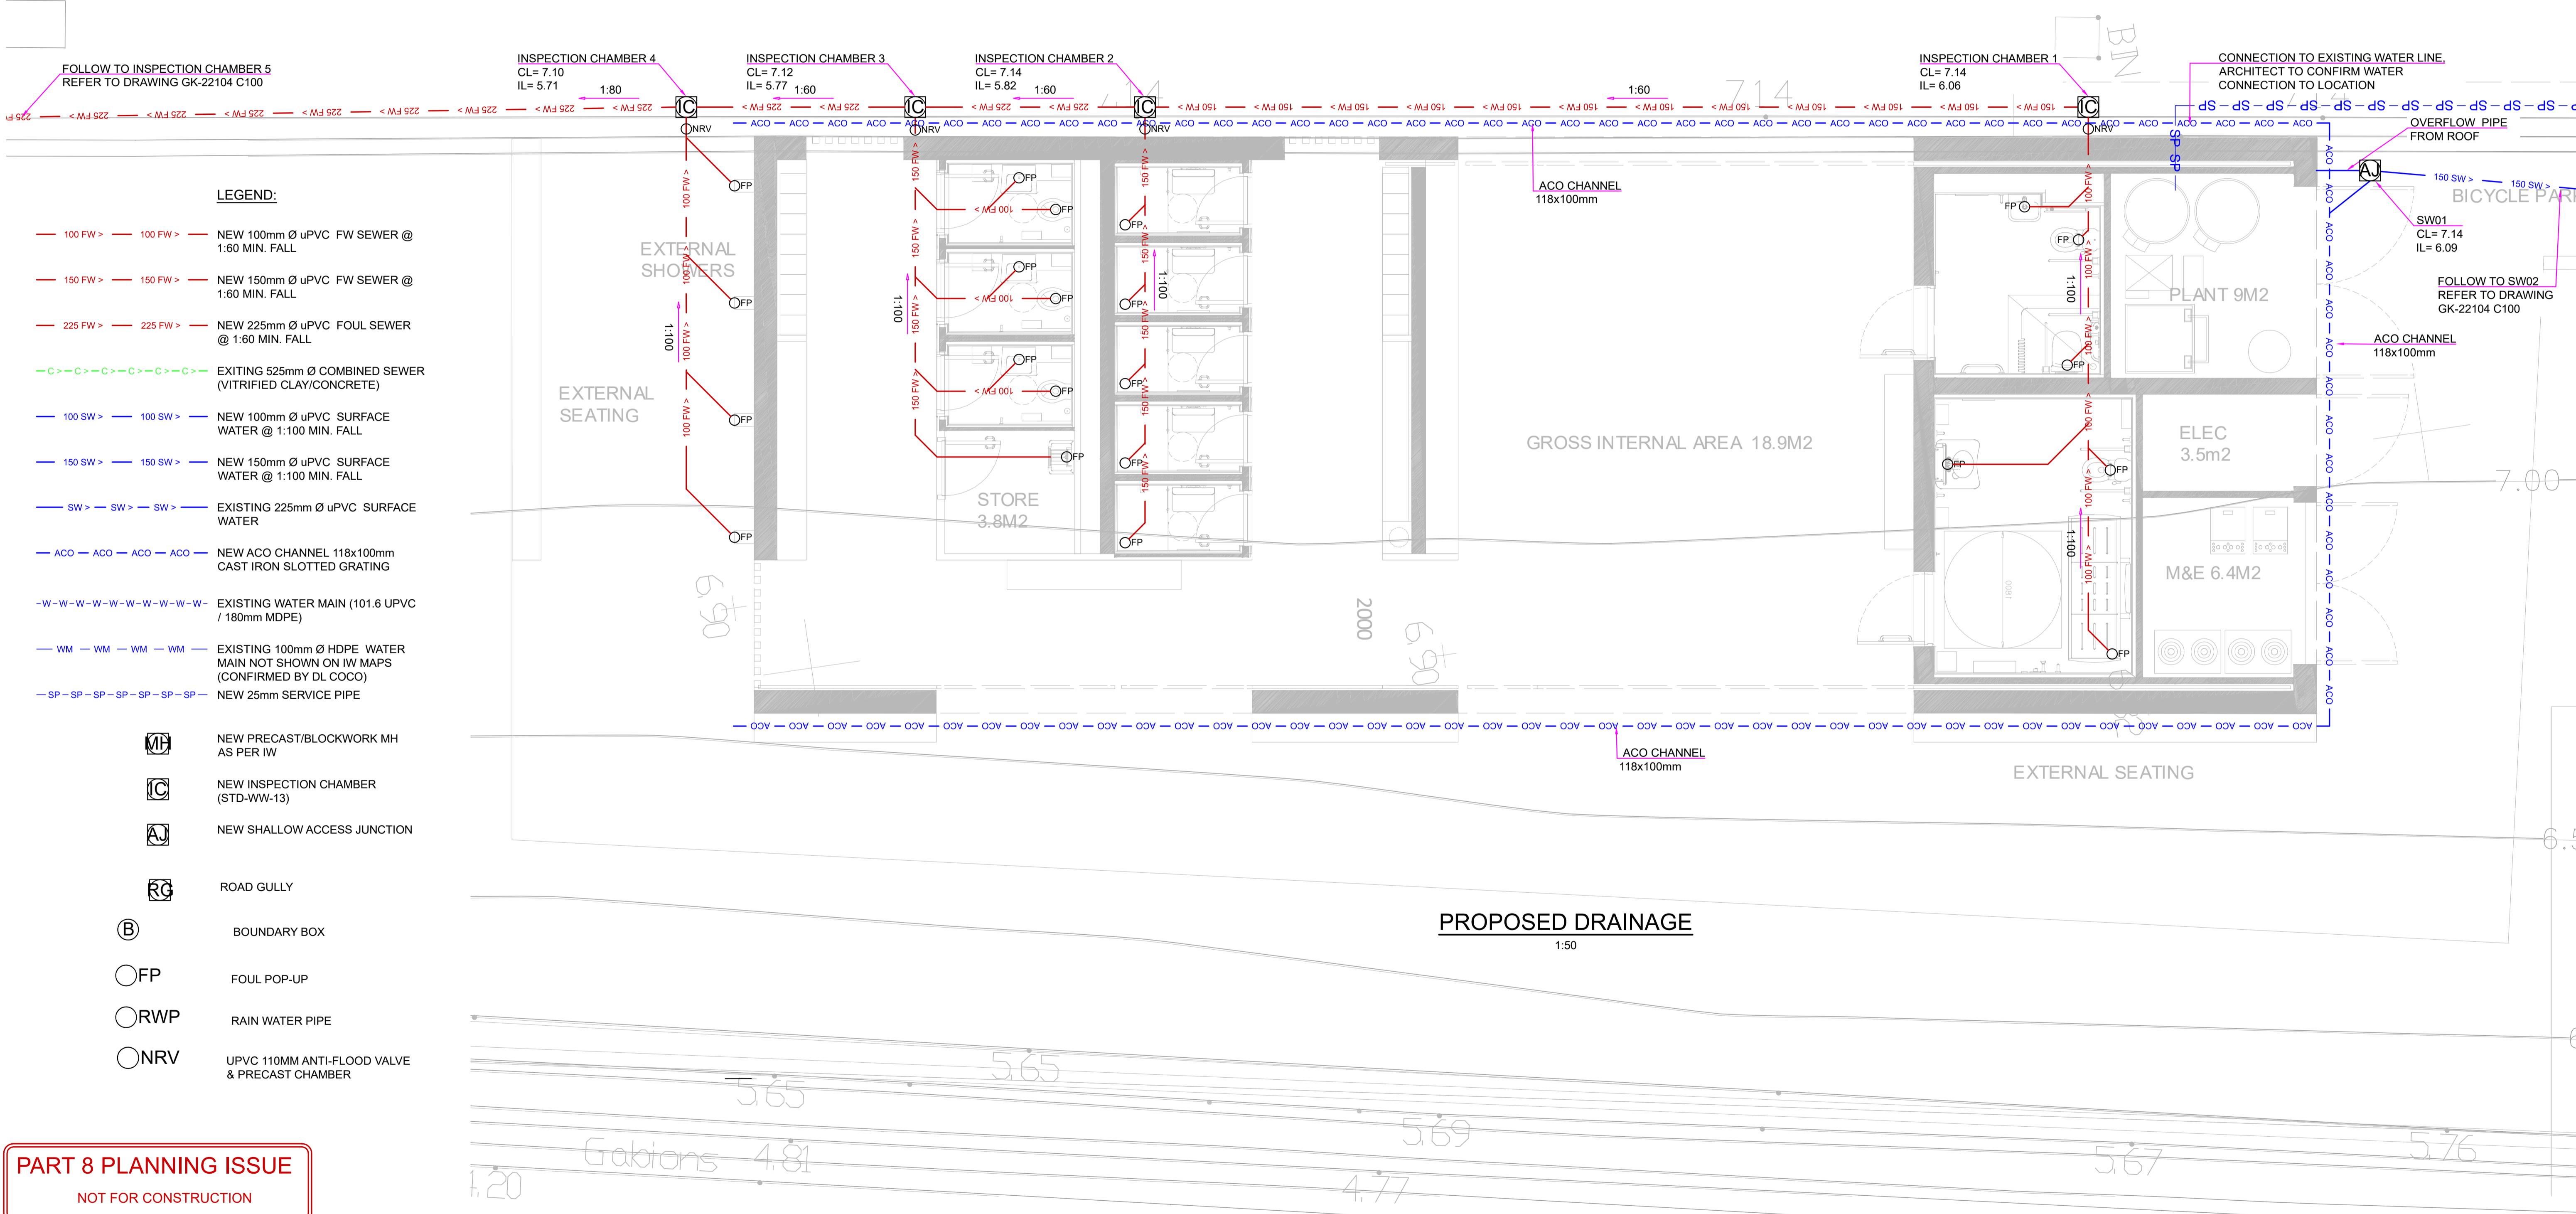

LEGEND:

- 100 FW > — 100 FW > NEW 100mm Ø uPVC FW SEWER @ 1:60 MIN. FALL
- 150 FW > — 150 FW > NEW 150mm Ø uPVC FW SEWER @ 1:60 MIN. FALL
- 225 FW > — 225 FW > NEW 225mm Ø uPVC FOUL SEWER @ 1:60 MIN. FALL
- - - - - EXISTING 525mm Ø COMBINED SEWER (VITRIFIED CLAY/CONCRETE)
- 100 SW > — 100 SW > NEW 100mm Ø uPVC SURFACE WATER @ 1:100 MIN. FALL
- 150 SW > — 150 SW > NEW 150mm Ø uPVC SURFACE WATER @ 1:100 MIN. FALL
- SW > — SW > EXISTING 225mm Ø uPVC SURFACE WATER
- ACO — ACO — ACO — ACO — NEW ACO CHANNEL 118x100mm CAST IRON SLOTTED GRATING
- W - W - W - W - W - W - W - W - EXISTING WATER MAIN (101.6 UPVC / 180mm MDPE)
- WM — WM — WM — WM — EXISTING 100mm Ø HDPE WATER MAIN NOT SHOWN ON IW MAPS (CONFIRMED BY DL COCO)
- SP — SP — SP — SP — SP — SP — NEW 25mm SERVICE PIPE

- NEW PRECAST/BLOCKWORK MH AS PER IW
- NEW INSPECTION CHAMBER (STD-WW-13)
- NEW SHALLOW ACCESS JUNCTION
- ROAD GULLY
- BOUNDARY BOX
- FOUL POP-UP
- RAIN WATER PIPE
- UPVC 110MM ANTI-FLOOD VALVE & PRECAST CHAMBER

PART 8 PLANNING ISSUE
NOT FOR CONSTRUCTION

NOTES

1. For setting out refer to Architect's drawings.
2. This drawing to be read in conjunction with all other Architectural and Engineering drawings and all other relevant drawings and Specifications.
3. DO NOT SCALE THIS DRAWING. Use figured dimensions only.
4. No part of this document may be reproduced or transmitted in any form or stored in any retrieval system of any nature without the written permission of GKCE LTD as copyright holder except as agreed for use on the project for which the document was originally issued.

PROGRESS

PLANNING

TENDER

CONSTRUCTION

| Issued To | Date | No. Of Copies |
|-------------------|------|---------------|
| Architect | | |
| Quantity Surveyor | | |
| Main Contractor | | |
| M. & E. Engineers | | |
| Client | | |
| Clerk of Works | | |

| Rev | By | Date | Description |
|-----|-----|------------|---------------------------|
| P1 | CRS | 31.08.2022 | PROGRESS |
| P2 | DMV | 31.07.2023 | NEW LAYOUT PROPOSAL |
| P3 | DMV | 15.08.2023 | NEW LAYOUT APPROVED |
| P4 | DMV | 07.12.2023 | NEW LAYOUT |
| P5 | DMV | 19.03.2024 | NON-RETURN VALVE ADDED |
| PL1 | DMV | | ISSUE FOR PART 8 PLANNING |

Scales AS SHOWN A1 Date DECEMBER 2023 Drawn DMV Checked

JOB TITLE
FACILITY CENTRE
FOR WATER SPORTS
KILLINEY BEACH

DRG. TITLE
PROPOSED BUILDING DRAINAGE
CONNECTIONS

GK Consulting Engineers LTD

Unit 11 Millbank Business Centre K78R261
ph 01 8749 322
email info@gkce.ie
www.gkce.ie

| | | | |
|----------------|--------------|------|-----|
| DRAWING NUMBER | GK22104-C101 | REV. | PL1 |
|----------------|--------------|------|-----|